




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT) -

(51) International Patent Classification 6 : H04L 27/00		A2	(11) International Publication Number: WO 99/39484
			(43) International Publication Date: 5 August 1999 (05.08.99)
(21) International Application Number: PCT/FI99/00063		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 29 January 1999 (29.01.99)			
(30) Priority Data: 980219 30 January 1998 (30.01.98) FI			
(71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): PIIRAINEN, Olli [FI/FI]; Pikisaarentie 1 E 11, FIN-90100 Oulu (FI). NIEMELÄ, Kari [FI/FI]; Löylykuja 3 as 2, FIN-90560 Oulu (FI).			
(74) Agent: PATENTTITOIMISTO TEKNOPOLOIS KOLSTER OY; c/o Kolster OY AB, Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).		Published In English translation (filed in Finnish). Without international search report and to be republished upon receipt of that report.	

(54) Title: TRANSMISSION METHOD AND RADIO SYSTEM

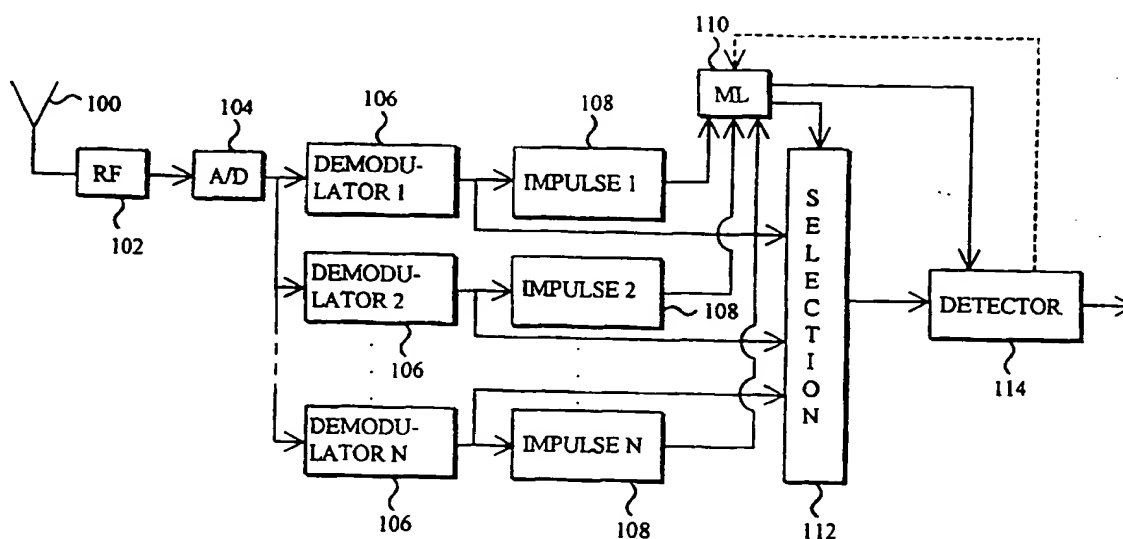

(57) Abstract

The invention relates to a data transmission method and a radio system implementing the method. A transmitter has at least two modulation methods by which it can modulate a signal. One or more demodulators (106) of the receiver demodulates the received signal in a manner which corresponds to each modulation method. An impulse response block (108) forms for the received signal an impulse response which corresponds to each modulation method used. The modulation method used for the signal is inferred in a reference block (110) from the impulse response estimate. The signal according to the inferred modulation method is detected in a detector (114).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

TRANSMISSION METHOD AND RADIO SYSTEM

FIELD OF THE INVENTION

The invention relates to a data transmission method used in a radio system comprising at least a base station and a terminal which include a transmitter and a receiver for signal transmission and reception, in which data transmission method a signal is transmitted in bursts which comprise a training sequence, at least two predetermined modulation methods can be used for a signal that is to be transmitted, and the modulation method used is interchangeable to another predetermined modulation method.

The invention also relates to a radio system comprising at least a base station and a terminal which include a transmitter and a receiver for signal transmission and reception, in which radio system the transmitter is arranged to transmit a signal in bursts which comprise a training sequence, it is possible to use at least two predetermined modulation methods for a signal that is to be transmitted, and the modulation method used is interchangeable to another predetermined modulation method.

BACKGROUND OF THE INVENTION

In radio telecommunication systems, the quality of a channel, or a radio path, varies continuously. In radio systems, the channel quality is affected by many factors, including multipath propagation, fadings, interference from the surroundings, and so on.

When known radio systems are planned the aim has been to guarantee the quality of a signal even when the channel quality is poor. When data transmission methods are planned a significant parameter is the modulation method used on a transmission path. Because of losses occurring on the transmission path and because of transmission path capacity, data symbols to be transmitted cannot be transmitted as such, but the symbols must be modulated by a suitable method so as to obtain good transmission path capacity and transmission quality. In other words, when known systems are developed the emphasis has been on selecting a modulation method which guarantees the transmission quality, in which case emphasis is put on the performance of the modulation methods in bad channel conditions. Consequently, the existing methods have a relatively poor ability to transmit signals having a high data rate. In other words, transmission capacity has been guaranteed by sacrificing capacity.

An example of known modulation methods is Gaussian minimum shift keying (GMSK) used in the GSM cellular radio systems (Global System for Mobile Communication). It has a narrow frequency spectrum and high performance, whereas data transmission rates are not very high. Coded continuous phase modulation methods (CPM) usually have a narrow frequency spectrum and high performance, making high data rates possible. However, equipments required become complex in structure, for which reason these methods have not been used in known systems.

In known radio systems it is problematic to change a modulation method smoothly during a continuous connection. The changing of the modulation method presents problems particularly in the receiver, since the transmitter may change the modulation method without notifying the receiver thereof beforehand. However, a smooth change of a modulation method is needed in packet-switched data transmission, for instance. Furthermore, a fast associated control channel (FACCH) signal is to be well-protected from interference particularly in the GSM radio system, even if data were otherwise transmitted by a modulation method allowing a high data rate and being thus prone to interference.

BRIEF DESCRIPTION OF THE INVENTION

An object of the invention is thus to provide a method and a radio system implementing the method so as to solve the above problem. The receiver can then effectively demodulate and detect a transmitted signal, even though the receiver did not know beforehand the modulation method used by transmitter. This is achieved by a method of the type presented in the introduction, which is characterized in that when the transmitted signal is received it is demodulated in the manner which corresponds to each modulation method; an impulse response estimate which corresponds to each modulation method used is formed for the signal received; and the modulation method which is used for the signal transmitted is inferred from the impulse response estimate, and the signal according to the modulation method inferred is selected to be detected. The method is also characterized in that when the transmitted signal is received it is demodulated by only one demodulation method; an impulse response estimate which corresponds to each modulation method used is formed for the signal received, and the modulation method

used for the transmitted signal is inferred from the impulse response estimate and the signal is detected.

The invention also relates to a radio system. The system of the invention is characterized in that the receiver comprises at least one demodulator for demodulating the received signal in the manner corresponding to each modulation method used; means for forming an impulse response estimate which corresponds to each modulation method used; means for selecting a demodulated signal for the detector; means for inferring from the impulse response estimate the modulation method which is used for the transmitted signal and for controlling the means to select for the detector a signal which is correspondingly demodulated. The system is also characterized in that the receiver comprises only one demodulator; means for forming an impulse response estimate which corresponds to each modulation method used; means for inferring from the impulse response estimate the modulation method which is used for the transmitted signal; a detector for detecting the signal, and the transmitter is arranged to use modulation methods which can be demodulated by one demodulator of the receiver.

The method and system of the invention provide many advantages. The inventive solution enables different modulation methods to be smoothly combined. Data transmission which is faster than in the prior art is realized particularly in packet-form transmission. In the GSM system, signalling can be carried out according to the prior art without transmitting FACCH bits.

BRIEF DESCRIPTION OF THE DRAWINGS

In the following, the invention will be described in more detail by means of preferred embodiments with reference to the accompanying drawings, in which

- Figure 1 shows a block diagram of a receiver,
- Figure 2 shows a block diagram of a receiver,
- Figure 3 shows a block diagram of a transmitter.
- Figure 4a shows a normal burst in the GSM system, and
- Figure 4b shows a modified normal burst,

DETAILED DESCRIPTION OF THE INVENTION

The solution of the invention is particularly applicable for use in a radio system of the GSM type without, however, restricting to it.

Let us first study the inventive method and receiver by means of Figure 1. The receiver, either a base station or a terminal, receives a signal by an antenna 100. The radio-frequency signal propagates from the antenna to radio frequency means 102 which multiply the signal received by a signal of a local oscillator and low-pass filter the multiplication result. The intermediate or baseband signal so formed is converted into a digital signal in an A/D converter 104. The digital signal is demodulated in the demodulator 106. The demodulator 106 operates in such a way that it comprises a specific demodulator for each of the N modulation alternatives. After the demodulator 106, an impulse response estimate is formed for the demodulated signal in means 108. The impulse response estimates propagate to means 110 which preferably infer, on the basis of maximum likelihood, the modulation by which the received signal was modulated upon transmission. The principle of maximum likelihood can be based on the energy of the impulse response, a signal-to-noise ratio or a signal-to-interference ratio. High impulse response energy, a good signal-to-noise ratio or a good signal-to-interference ratio indicate the most probable modulation method. The means 110 control a selection means 112, preferably a multiplexer, to select a signal to a detector 114 from the demodulator which, on the basis of the maximum likelihood, corresponds best to the modulation of the signal. The means 110 also control the detector 114 to operate in a correct mode with respect to the modulation of the signal. The detected signal further propagates to prior art processes which are irrelevant to the inventive solution.

Figure 2 shows another receiver solution which is applicable when differently modulated signals can be demodulated by a single demodulation method. Such modulation methods include Gaussian minimum shift keying (GMSK) and differentially coded binary continuous phase modulation (DBCPM) methods, for example. GMSK modulation is a modulation method obvious to those skilled in the art, and DBCPM modulation is presented in the GSM standardization forum. A document associated with DBCPM modulation and incorporated herein by reference can be found by the code ETSI STC SMG2 WPB: Tdoc SMG2 WPB 52/98. In DBCPM modulation, a signal is multiplied by a modulation index, such as $\pi/4$. In the solution of Figure 2, the received signal propagates from an antenna 200 to radio frequency means 202 which are similar to those in the case of Figure 1. The intermediate or baseband signal is converted into a digital signal in an A/D converter 204. The

digital signal is demodulated in a demodulator 206 and an impulse response estimate is formed of the signal in means 208. A specific impulse response estimate is formed for each modulation method in a specific estimation block. The modulation method is inferred in means 210 on the basis of the impulse response estimate by preferably using the principle of maximum likelihood. The principle of maximum likelihood may be based on the energy of the impulse response, a signal-to-noise ratio or a signal-to-interference ratio. High impulse response energy, a good signal-to-noise ratio or a good signal-to-interference ratio indicate the most probable modulation method. The means 210 control the mode of a detector 212 so that the demodulated signal that has arrived from the demodulator can be detected. The detected signal further propagates to prior art processes which are irrelevant to the inventive idea.

In the solution of Figure 1, the detector 114 may also influence on the operation of the means 110 for choosing the modulation method. In that case, the modulation used is inferred again by means of at least partly detected signal, i.e. the correctness of the original inference is checked and the means 110 and the detection mode of the detector 114 are controlled. In the solution according to Figure 2, the detection mode of the detector 212 can be changed on the basis of the detected signal. The signal can be partly detected by means of portion of a burst, for example.

Figure 3 shows an example of a block diagram of a transmitter. A transmitter comprises a modulator 300 which is controlled by a controller 302. The modulator can modulate a signal to be transmitted by at least two modulation methods. The controller 302 chooses the modulation method used by the modulator. For example in the GSM system, connection quality permitting, the transmitter transmits a signal at a high data rate by the DBCPM modulation method, but the transmitter which comprises a burst which contains FACCH information transmits at a lower data transmission rate by the conventional GMSK modulation method. For example, DBCPM modulation may have double the data transmission rate as compared with GMSK modulation. Other modulation pairs include quarternary offset quadrature amplitude modulation (Q-O-QAM) and binary offset quadrature amplitude modulation (B-O-QAM). However, the invention is not restricted to modulation methods. The modulated signal propagates next to radio frequency means 304 which multiply the signal by a carrier wave and high-pass filter it. The radio-frequency signal

propagates to an antenna 306 which radiates the signal as radio waves to its surroundings.

Let us now have a closer look at a case according to the GSM system, in which case the transmitter transmits by the DBCPM and GMSK modulation methods. Figure 4A shows a normal burst in the GSM radio system. The burst comprises a data part 400, a FACCH flag bit 402, a training sequence 404, a second FACCH flag bit and a second data part 408. In a conventional GSM transmission the FACCH signal uses the two bits 402 and 406 on both sides of the training sequence 404. It is very important to transmit the FACCH bits reliably. The burst which comprises FACCH bits is therefore always transmitted at a lower data transmission rate, i.e. by the conventional GMSK modulation. Consequently, no FACCH bits are needed in a burst which is transmitted at a higher data transmission rate and modulated by the DBCPM modulation method. This kind of burst which comprises a data part 410, a training sequence 412 and a second data part 414 is presented in Figure 4B. In the inventive solution the training sequences 404 and 412 of different bursts are preferably overlapped in time domain, i.e. they are at the same point in the burst. In the inventive solution the modulated training sequences are also substantially orthogonal and therefore maximally differ from each other and make it easier to separate the modulations.

Although the invention is described above with reference to the examples according to the accompanying drawings, it is obvious that the invention is not restricted thereto, but it can be modified in a variety of ways within the scope of the inventive idea disclosed in the attached claims.

CLAIMS

1. A data transmission method used in a radio system comprising at least a base station and a terminal which include a transmitter and a receiver for signal transmission and reception, in which data transmission method a signal is transmitted in bursts which comprise a training sequence (404, 412), it is possible to use at least two predetermined modulation methods for a signal that is to be transmitted, and the modulation method used is interchangeable to another predetermined modulation method, **characterized** in that

when the transmitted signal is received it is demodulated in the manner corresponding to each modulation method;

an impulse response estimate which corresponds to each modulation method used is formed for the received signal; and

the modulation method which is used for the transmitted signal is inferred from the impulse response estimate and the signal according to the inferred modulation method is selected to be detected.

2. A data transmission method used in a radio system comprising at least a base station and a terminal which include a transmitter and a receiver for signal transmission and reception, in which data transmission method a signal is transmitted in bursts which comprise a training sequence (404, 412), it is possible to use at least two predetermined modulation methods for a signal that is to be transmitted, and the modulation method used is interchangeable to another predetermined modulation method, **characterized** in that

when the transmitted signal is received it is demodulated by only one demodulation method;

an impulse response estimate which corresponds to each modulation method used is formed for the received signal; and

the modulation method used for the transmitted signal is inferred from the impulse response estimate and the signal is detected.

3. A method as claimed in claim 2, **characterized** in that a detection mode for detecting the signal is selected according to the modulation method used.

4. A method as claimed in claim 1 or 2, **characterized** in that the modulation method is inferred from the impulse response by means of the principle of maximum likelihood.

5. A method as claimed in claim 1 or 2, **characterized** in that the training sequences (404, 412) are overlapped in time domain in a burst transmitted by each modulation method.

6. A method as claimed in claim 5, **characterized** in that the training sequences (404, 412) modulated by different modulation methods and overlapped in time domain are mutually substantially orthogonal, whereby separating different modulation methods becomes easier in reception.

7. A method as claimed in claim 1 or 2, **characterized** in that the modulation method is inferred from the impulse response by means of the energy of the impulse response, a signal-to-noise ratio or a signal-to-interference ratio.

8. A method as claimed in claim 1 or 2, **characterized** in that the received signal is detected at least partly and the detected portion is utilized when the modulation method of the received signal is inferred.

9. A method as claimed in claim 1 or 2, **characterized** in that modulation methods which operate at a different data transmission rate are used.

10. A method as claimed in claim 9, **characterized** in that when the GSM radio system is used and when a FACCH signal is transmitted, the FACCH signal is always transmitted at a lower data transmission rate, whereby no FACCH bits are needed in the bursts (412) which operate at higher data transmission rates.

11. A method as claimed in claim 9, **characterized** in that two modulation methods are used, of which one is DBCPM enabling higher data transmission rate and the other is GMSK.

12. A radio system comprising at least a base station and a terminal which include a transmitter and a receiver for signal transmission and reception, in which radio system the transmitter is arranged to transmit a signal in bursts which comprise a training sequence (404, 412), it is possible to use at least two predetermined modulation methods for a signal that is to be transmitted, and the modulation method used is interchangeable to another predetermined modulation method, **characterized** in that the receiver comprises

at least a demodulator (106, 206) for demodulating the received signal in the manner corresponding to each modulation method used;

means (108) for forming an impulse response estimate which corresponds to each modulation method used;

5 means (112) for selecting a demodulated signal for the detector (114);

means (110) for inferring from the impulse response estimate the modulation method which is used for the transmitted signal and for controlling the means (112) to select for the detector (114) a signal which is correspond-
10 ingly demodulated.

13. A radio system comprising at least a base station and a terminal which include a transmitter and a receiver for signal transmission and reception, in which radio system the transmitter is arranged to transmit a signal in bursts which comprise a training sequence (404, 412), it is possible to use at
15 least two predetermined modulation methods for a signal that is to be transmitted, and the modulation method which is used is interchangeable to another predetermined modulation method, **characterized** in that the receiver comprises

only one demodulator (206);

20 means (208) for forming an impulse response estimate which corresponds to each modulation method used;

means (210) for inferring from the impulse response estimate the modulation method which is used for the transmitted signal;

a detector (212) for detecting the signal, and

25 the transmitter is arranged to use modulation methods which the one demodulator (206) of the receiver is able to demodulate.

14. A radio system as claimed in claim 12 or 13, **characterized** in that the means (110, 210) for inferring the modulation method from the impulse response are arranged to use the principle of maximum likelihood.

30 15. A radio system as claimed in claim 12 or 13, **characterized** in that the training sequences (404, 412) of different bursts are overlapped in time domain in each modulation method used by the transmitter.

16. A radio system as claimed in claim 15, **characterized** in that the training sequences (404, 412) which are modulated by different
35 modulation methods and overlapped in time domain are mutually substantially

orthogonal, whereby the resolution capacity of different modulation methods increases in the receiver.

17. A radio system as claimed in claim 12 or 13, **characterized** in that the means (110, 210) for inferring the modulation method from the impulse response are arranged to use the energy of the impulse response, a signal-to-noise ratio or a signal-to-interference ratio.

18. A radio system as claimed in claim 12 or 13, **characterized** in that the receiver is arranged to detect the signal at least partly and means (110, 210) for inferring the modulation method are arranged to utilize the detected portion.

19. A radio system as claimed in claim 12, **characterized** in that the transmitter is arranged to use modulation methods which operate at a different data transmission rate.

20. A radio system as claimed in claim 19, **characterized** in that the radio system is a GSM radio system which is arranged to transmit a FACCH signal, a transmitter FACCH signal is arranged to always transmit at a lower data transmission rate, whereby no FACCH bits are needed in bursts of the modulation methods which operate at higher data transmission rates.

21. A radio system as claimed in claim 12 or 13, **characterized** in that the transmitter is arranged to use two modulation methods, of which one is DBCPM enabling a higher data transmission rate and the other is GMSK.

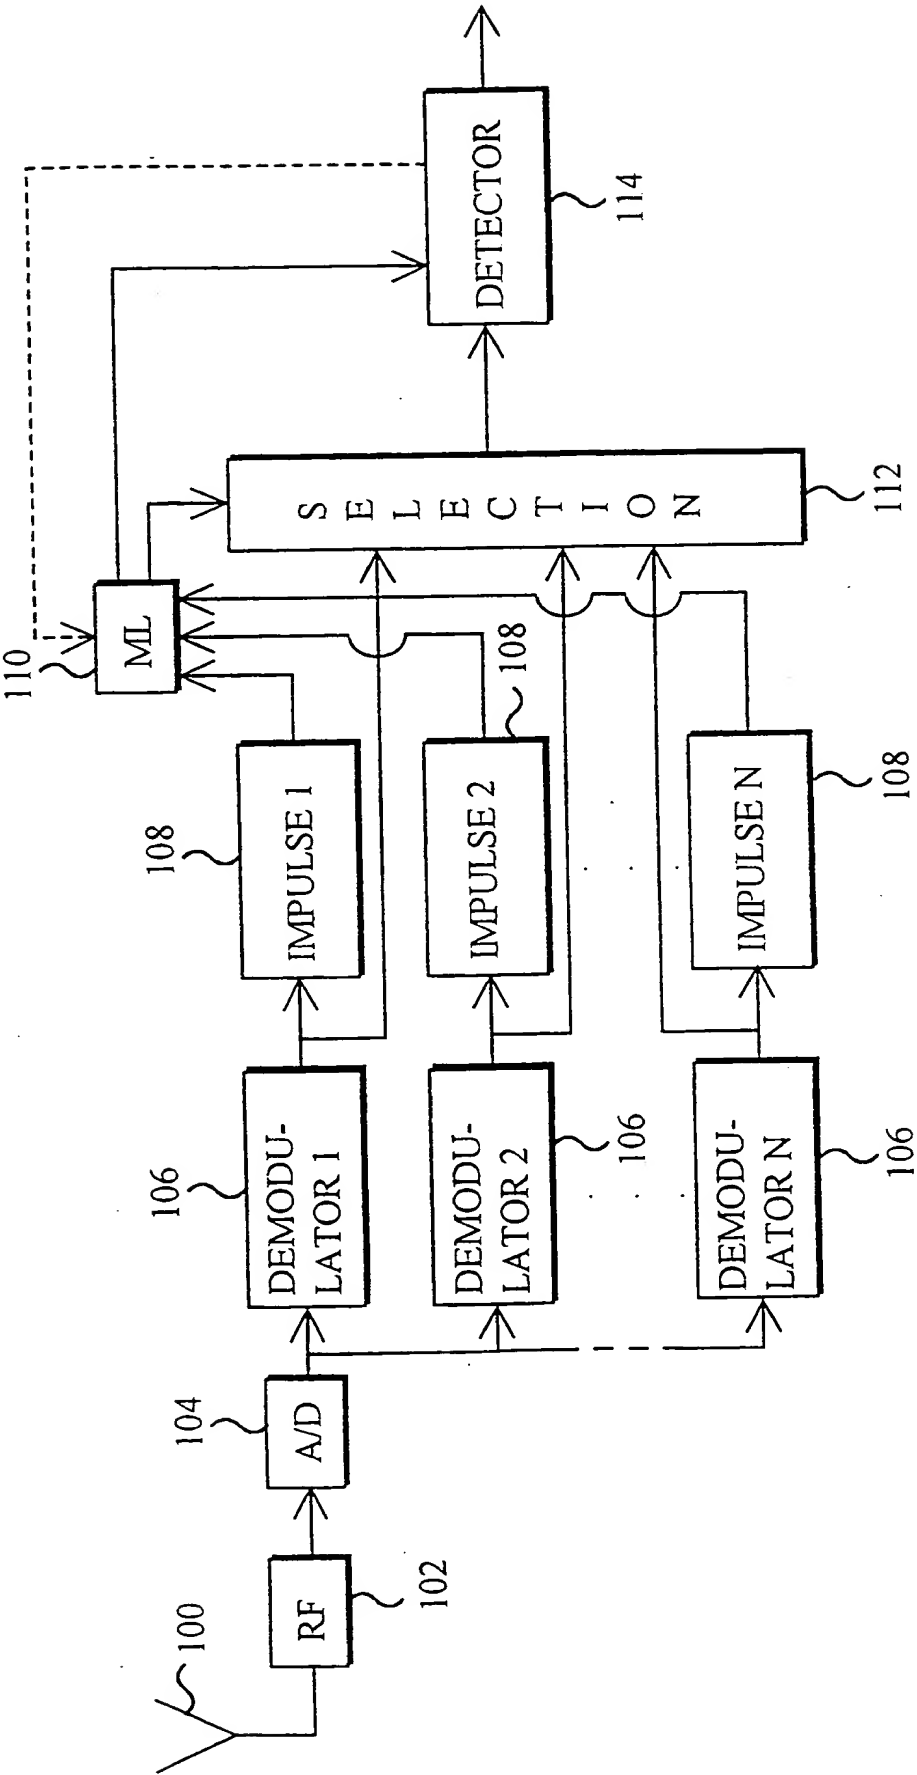


FIG. 1

2/3




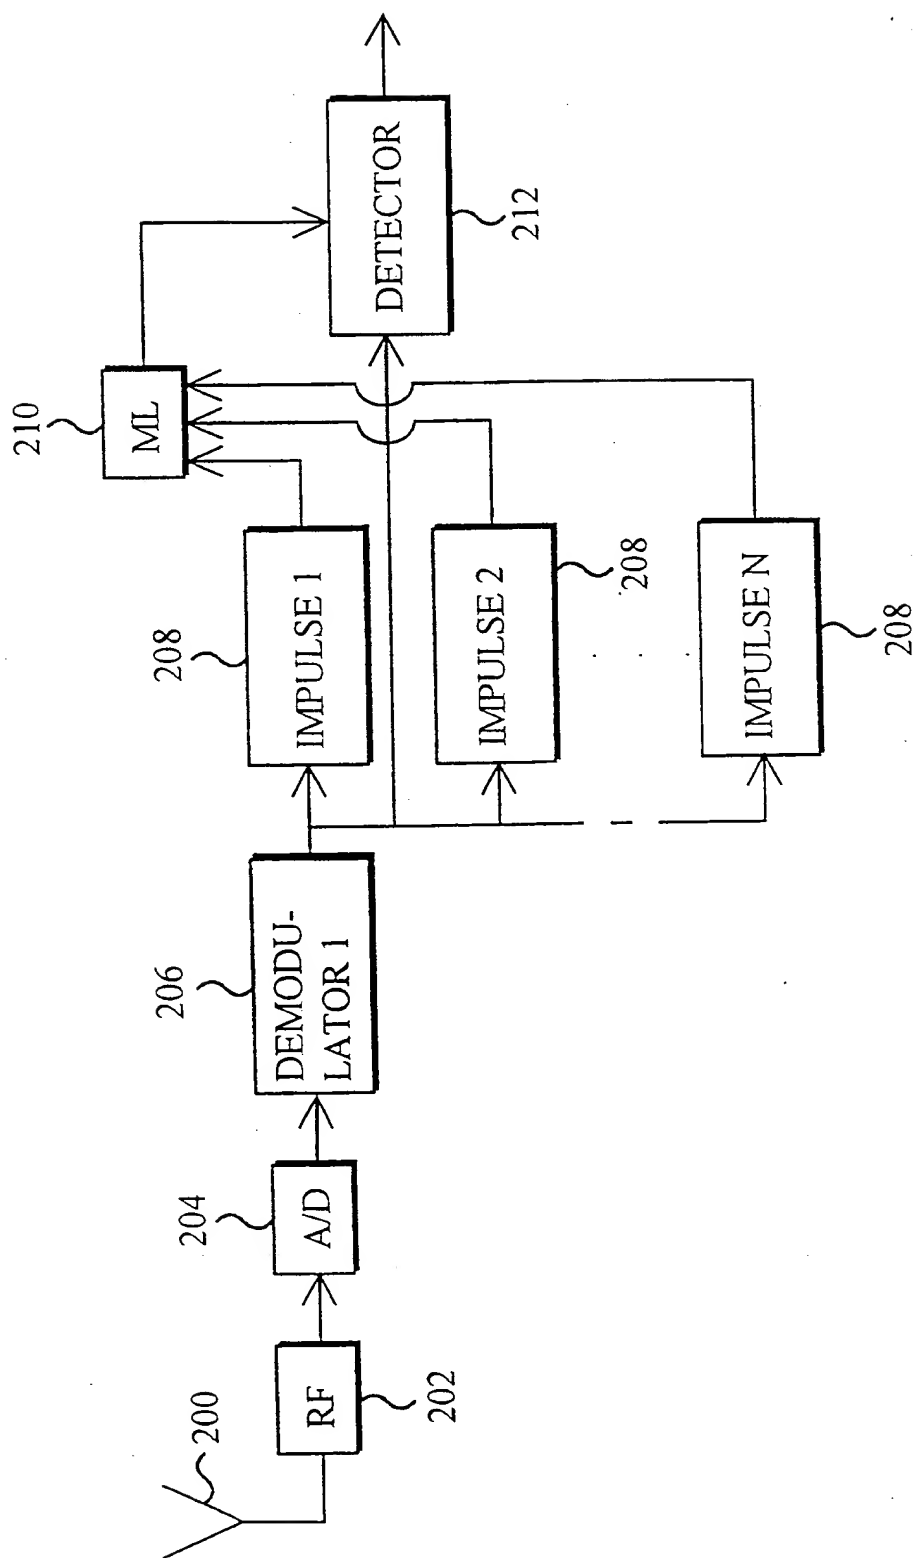


FIG. 2

3/3

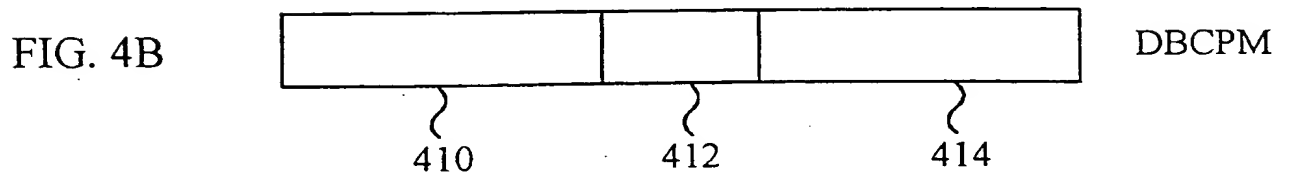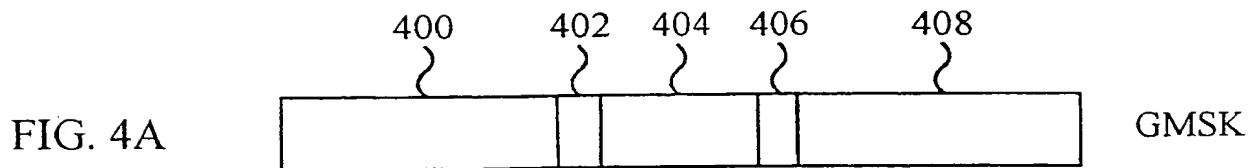

This Page Blank (uspto)

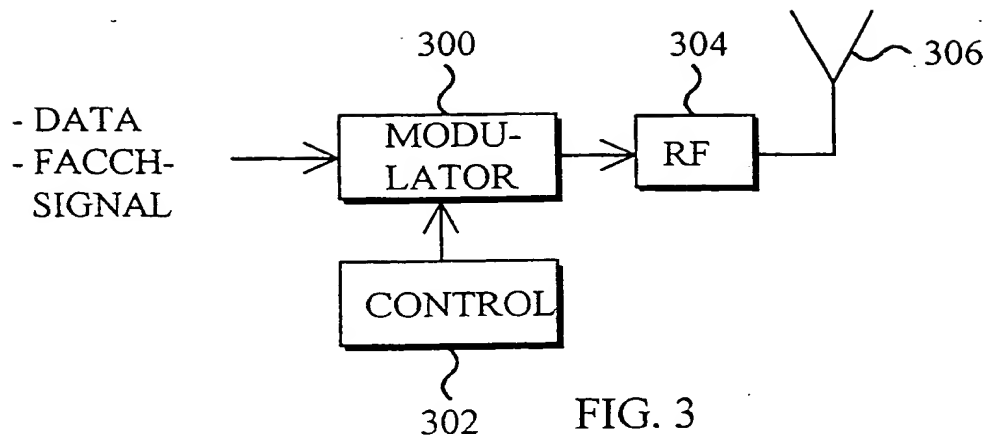

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :

H04L 27/00

A3

(11) International Publication Number:

WO 99/39484

(43) International Publication Date:

5 August 1999 (05.08.99)

(21) International Application Number: PCT/FI99/00063

(22) International Filing Date: 29 January 1999 (29.01.99)

(30) Priority Data:

980219

30 January 1998 (30.01.98)

FI

(71) Applicant (for all designated States except US): NOKIA
TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4,
FIN-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): PIIRAINEN, Olli [FI/FI];
Pikisaarentie 1 E 11, FIN-90100 Oulu (FI). NIEMELÄ, Kari
[FI/FI]; Löylykuja 3 as 2, FIN-90560 Oulu (FI).(74) Agent: PATENTTITOIMISTO TEKNOPOLOIS KOLSTER
OY; c/o Kolster OY AB, Iso Roobertinkatu 23, P.O. Box
148, FIN-00121 Helsinki (FI).(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ,
BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility
model), DE, DE (Utility model), DK, DK (Utility model),
EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD,
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP,
KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK,
MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI,
SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US,
UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW,
SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ,
MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE,
DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE),
OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML,
MR, NE, SN, TD, TG).


Published

*With international search report.**Before the expiration of the time limit for amending the
claims and to be republished in the event of the receipt of
amendments.**In English translation (filed in Finnish).*

(88) Date of publication of the international search report:

23 September 1999 (23.09.99)

(54) Title: TRANSMISSION METHOD AND RADIO SYSTEM

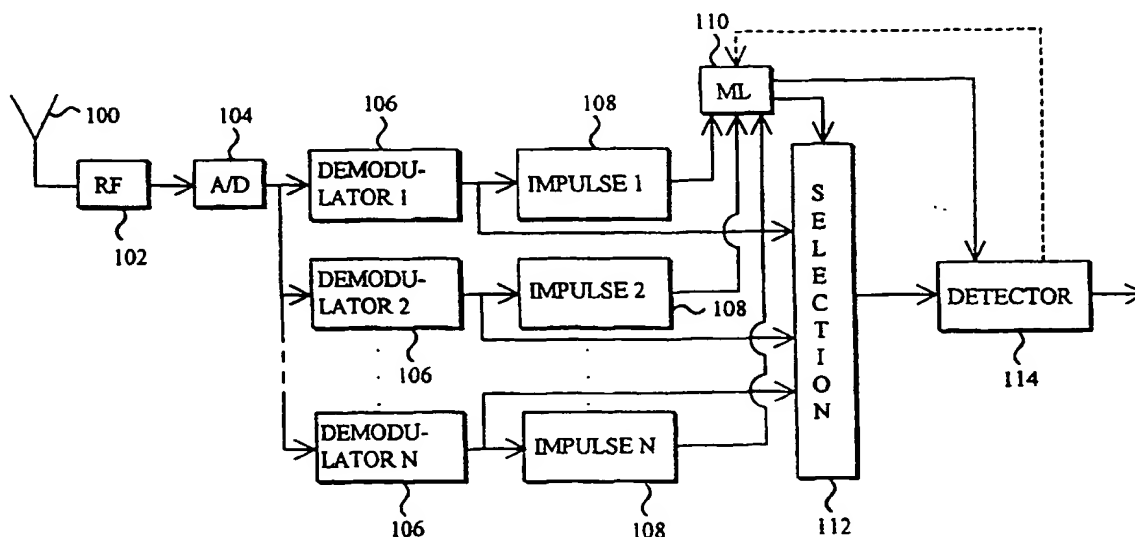

(57) Abstract

The invention relates to a data transmission method and a radio system implementing the method. A transmitter has at least two modulation methods by which it can modulate a signal. One or more demodulators (106) of the receiver demodulates the received signal in a manner which corresponds to each modulation method. An impulse response block (108) forms for the received signal an impulse response which corresponds to each modulation method used. The modulation method used for the signal is inferred in a reference block (110) from the impulse response estimate. The signal according to the inferred modulation method is detected in a detector (114).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00063

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04L 27/00

According to International Patent Classification (IPC) or to both national classification and IPC.

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0619665 A2 (HITACHI, LTD.), 12 October 1994 (12.10.94), page 2, line 15 - line 34, figure 4, abstract --	1-21
A	WO 9512244 A1 (MOTOROLA INC.), 4 May 1995 (04.05.95), figure 2, abstract --	1-21
A	US 4227255 A (ROBERT L. CARRICK ET AL), 7 October 1980 (07.10.80), column 1, line 59 - line 68; column 2, line 1 - line 7, abstract -- -----	1-21

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

4 August 1999

Date of mailing of the international search report

06-08-1999

Name and mailing address of the ISA/

Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Peder Gjervaldsaeter/MN
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/07/99

International application No.
PCT/FI 99/00063

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0619665 A2	12/10/94	JP 6343085 A US 5557644 A	13/12/94 17/09/96
WO 9512244 A1	04/05/95	AU 671781 B AU 7956394 A CA 2150938 A EP 0676096 A JP 8505510 T US 5553101 A	05/09/96 22/05/95 04/05/95 11/10/95 11/06/96 03/09/96
US 4227255 A	07/10/80	NONE	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)